

C 300

-for tubes, pipes, profiles, light structural

Standard Equipment Includes:

- TEFC Motor
- Totally Enclosed Transmission
- 24 Volt Controls
- HSS Saw blade
- Built-in Flood Coolant
- All Safety Guards
- Operators Manual/Parts List

Specifications:

HP	3
Electrical (specify one)	220/1, 220/3, 460/3
Max Blade (in)	12
Spindle RPM	33/104-3ph or 50-1ph
Max Vise Opening	6.25"
Weight	365



Capacity Chart:

	○	□	▭
90	4	3.5	4.75 x 3
45 (l)	3.5	3	3.25 x 2.75
45 (r)	3	2.75	3 x 2.75


Capacities shown are max envelope. Each individual cutting job must be considered with regards to type and shape of material, and quantity of pieces per day.

Accessories:


- AC100 Freestanding Roller Conveyor 12" x 5'
- AC101 Freestanding Roller Conveyor 12" x 10'
- AC300 Custom infeed/outfeed conveyor mounted to machine 12"x5'
- AC301 Custom infeed/outfeed conveyor mounted to machine 12"x10'
- AC303 Accu-cut material stop w/ scale 0-72" long
- AC106 Vertical Guide Rollers (set of two)
- AC102 Custom worktable infeed/outfeed 6' conveyor mounted to machine
- AC103 Additional 6' for above
- AC104 Custom worktable infeed/outfeed 6' conveyor mounted to machine w/ measuring system
- AC105 Additional 6' for above
- AC106 Vertical Guide Rollers (set of two)
- AC230 Mobile Kit



Machine not yet on base

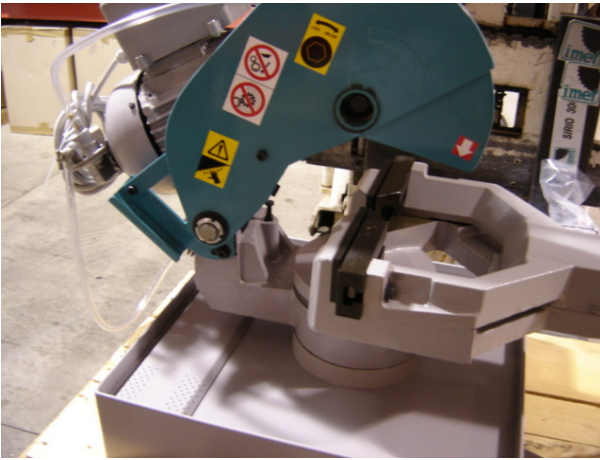

Left side of machine

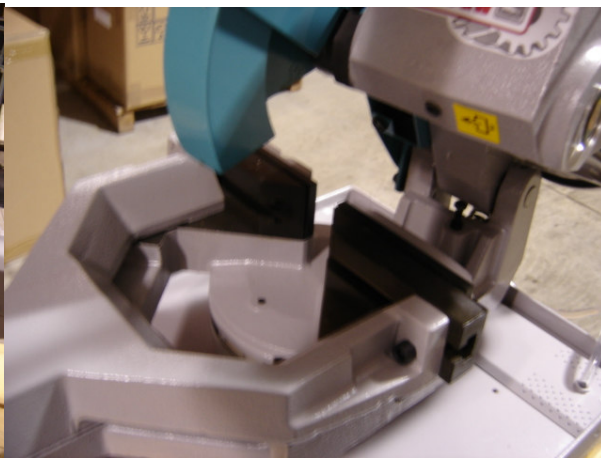

Right side and vise view

Uni-Hydro

1-800-328-0036
310 E Gemini Ave
Cosmos, MN 56228
www.unihydro.com
sales1@unihydro.com